


Spotted Gum

Botanical Name: Eucalyptus Maculata

Spotted Gum has a wide range of colours depending on the location of the source forest. Ranging from light brown through definite browns to deep red-brown hues. It can also have patches of white to light brown colours running through it up to 50mm wide. Spotted Gum is a moderately coarse and uneven textured wood with some timbers having the additional feature of a wavy grain, giving rise to an attractive fiddleback figure.

Typical Characteristics

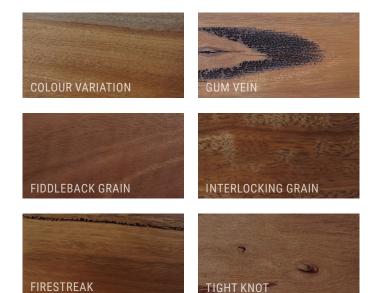

Origin	New South Wales and Queensland
Species Type	Hardwood
Sustainability	ON REQUEST ONLY. Available in PEFC 21-31-167 with a Chain of Custody for Green Star points.
Availability	Readily available
Durability	Class 1 - greater than 40 years
Hardness	Janka 11
Density (dry)	990kg/m³
Movement	Medium tangential 6.1% (shrinkage across the board width)
Treatment	ACQH3
Lyctid Susceptibility	Susceptible
Termite Resistance	Resistant
Fire	Satisfies BAL 12.5, 19 and 29 under AS3959-2009. Satisfies BCA C1.10a Group 3
Lengths	Average length 2.4m (this can vary depending on availability)
Typical Applications	Internal cladding and battens External cladding and battens



sculptform.com | support@sculptform.com

REFERENCES: Wood Solutions (www.woodsolutions.com.au); Australian Standards AS5604-2005; Wood in Australia by Keith R. Bootle 2002 ISBN 0 07 451047 9.; Australian Standards AS 3959-2009

NOTE: To maintain currency, this document is periodically reviewed, and new editions are published. Between editions, amendments may be issued, so its important that readers assure themselves they are using a current document. We welcome suggestions for improvement, and encourage readers to notify us immediately of any apparent inaccuracies or ambiguities. Contact us via email support@sculptform.com





